


# DURACELL®

# DL1/3N

Lithium/Manganese Dioxide Battery

Li/MnO<sub>2</sub>

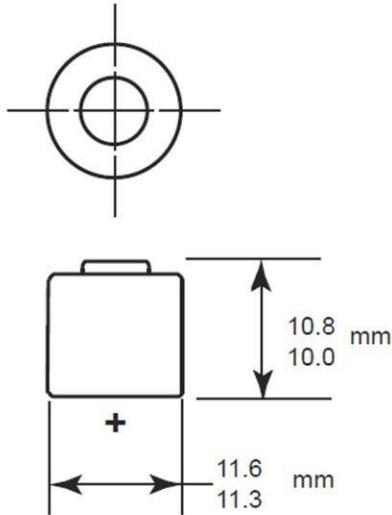


Dimensions shown are IEC/ANSI standards

## SPECIFICATIONS

<b>Nominal Voltage:</b>	3.0 V
<b>Typical Voltage:</b>	3.0 - 3.3 V
<b>Nominal Internal Impedance:</b>	250 mΩ @ 1kHz
<b>Average Weight:</b>	3.0 g (0.106 oz.)
<b>Terminals:</b>	Flat, Cap & Base
<b>Operating Temp. Range:</b>	-20°C to 60°C (-4°F to 140°F)
<b>NEDA/ANSI:</b>	5008LC
<b>IEC:</b>	CR11108

## DL1/3N Discharge Load vs Capacity to 2.0 volts

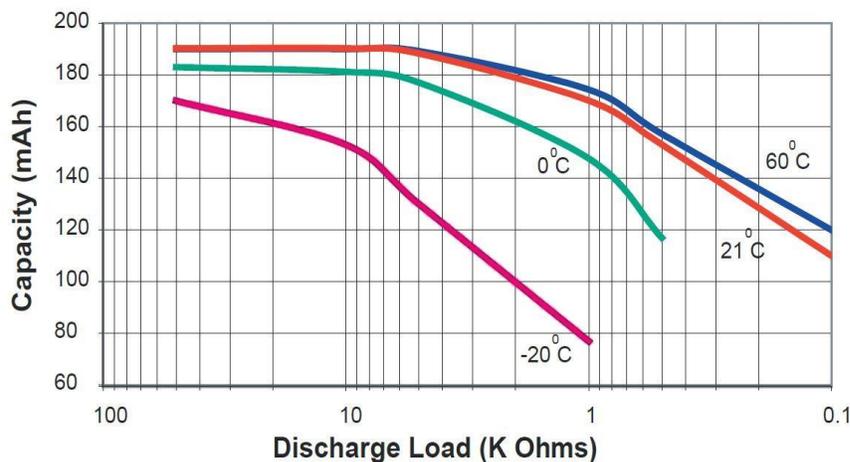

# DURACELL®

BATTERIES

Berkshire Corporate Park  
Bethel, CT. 06801 U.S.A.  
Telephone: Toll-free 1-800-544-5454  
www.duracell.com

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.